

GoldStar

Ductless Mini-split Air Conditioners & Heat Pumps



• Quiet • Efficient • Comfortable • Affordable • Simple to Install •

Single & Multiple Systems

12,000 – 24,000 BTU/hr Heating & Cooling

- Environmentally Friendly R-410A Refrigerant
- Advanced Fuzzy Logic II Microprocessor Control
- High Efficiency Rotary Compressor
- Only Low Voltage Wiring to Indoor Unit
- Super-Quiet Brushless DC Indoor Fan Motor
- Built-in Refrigerant Accumulator
- Four-Way Air Diffusion
- Sleek Streamlined Indoor Styling
- Hush-Quiet Outdoor Unit
- 36 vDC Indoor Unit
- Advanced Refrigerant Circuitry
- Whisper-Quiet Sleep Mode
- Auto Restart
- Jet-Cool Mode
- Dehumidification Mode
- Easy to Understand Wireless Remote Control
- Random (Chaos) Swing Emulates Breezes



The GoldStar Advantage


High Efficiency
Rotary Compressor




Environmentally
Friendly Refrigerant



Silent Efficient
Coil Design



Exceptional Air
Distribution

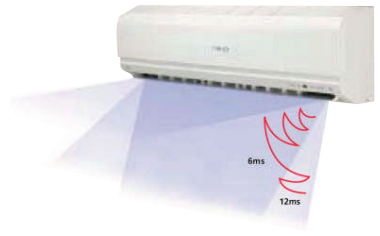

System Specifications

Model#	Cool/Heat	BTU	SEER	Indoor DBA H/M/L	Indoor Unit WxHxD (Inches)	Outdoor DBA	Outdoor Unit WxHxD (Inches)
Single Mini-Split Air Conditioners							
GS120CE	C	11,500	13	41/36/34	35-3/16 x 11 x 6-1/2	48	30-5/16 x 21-5/16 x 9-19/32
GS180CE	C	18,000	13	41/38/36	42-15/16 x 11-13/16 x 7-1/32	55	34-5/16 x 31-1/2 x 12-5/8
GS240CE	C	22,500	13	41/38/36	42-15/16 x 11-13/16 x 7-1/32	57	34-5/16 x 31-1/2 x 12-5/8
Single Mini-Split Heat Pumps							
GS120HE	C H	11,500/11,500	13	41/36/34	35-3/16 x 11 x 6-1/2	48	30-5/16 x 21-5/16 x 9-19/32
GS180HE	C H	19,500/19,000	13	41/38/36	42-15/16 x 11-13/16 x 7-1/32	55	34-5/16 x 31-1/2 x 12-5/8
GS240HE	C H	22,500/22,100	13	41/38/36	42-15/16 x 11-13/16 x 7-1/32	57	34-5/16 x 31-1/2 x 12-5/8
Dual Zone Multi Split Cooling Only							
GMO240C	C	18,000 - 24,000	13			50	40-5/32 x 34-3/16 x 17-5/16
GMI090CE	C	9,000	13	31/29/22	33-1/16 x 10-5/8 x 6-1/32		
GMI120CE	C	12,000	13	39/25/21	35-3/16 x 11 x 6-1/2		
Dual Zone Multi Split Indoor Heat Pump							
GMO240H	C H	18,000 - 24,000	13			50	40-5/32 x 34-3/16 x 17-5/16
GMI120HE	C H	12,000	13	39/25/21	33-3/16 x 11 x 6-1/2		

Electrical Specifications

Model#	Line Set	Max Length	Max Vertical	Outdoor Voltage	Rated AMPs	Min Cir. Ampacity	Max Over-Current	Indoor Wire 36VDC
Single Mini-Split Air Conditioners								
GS120CE	1/2" - 1/4"	50'	25'	115	7	15	25	4 - # 18
GS180CE	1/2" - 1/4"	100'	50'	208/230	8.6/9.5	20	20	4 - # 18
GS240CE	5/8" - 1/4"	100'	50'	208/230	11.5/12.5	20	30	4 - # 18
Single Mini-Split Heat Pumps								
GS120HE	1/2" - 1/4"	50'	25'	115	10.5	15	25	4 - # 18
GS180HE	5/8" - 1/4"	100'	50'	208/230	11.5/12.5	20	30	4 - # 18
GS240HE	5/8" - 1/4"	100'	50'	208/230	14.5/15.6	20	30	4 - # 18
Dual Zone Multi Split Cooling Only								
GMO240C	3/8" - 1/4"	50'	25'	208/230	11.1/12.2	15	20	4 - # 18 x 2
Dual Zone Multi Split Indoor Heat Pump								
GMO240H	3/8" - 1/4"	50'	25'	208/230	11.1/12.2	15	20	4 - # 18 x 2

YOUR LOCAL DEALER:

GoldStar
550 Matheson Boulevard East, Mississauga, ON L4Z 4G3

Specifications subject to change without notice